
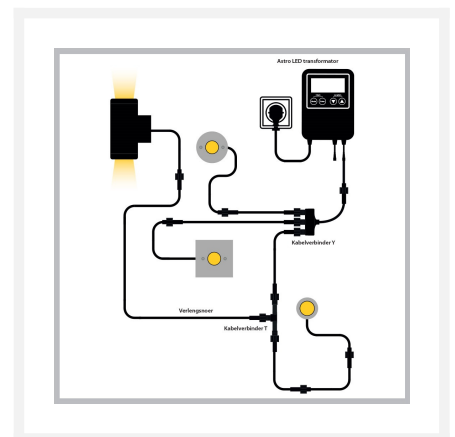
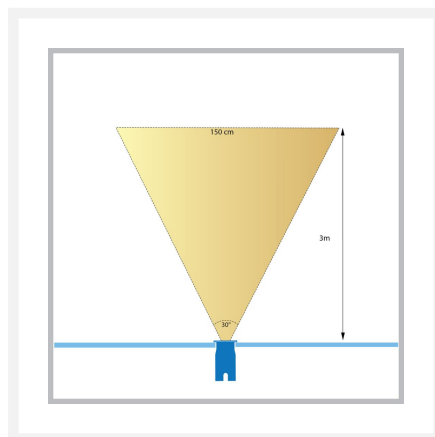
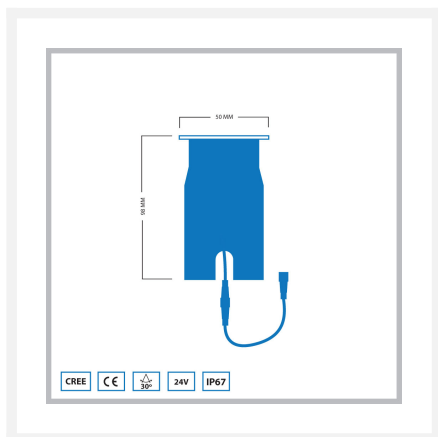


## Cree LED ground light Braga | warm white | 3 watt | square | 24 volts

### Product Images

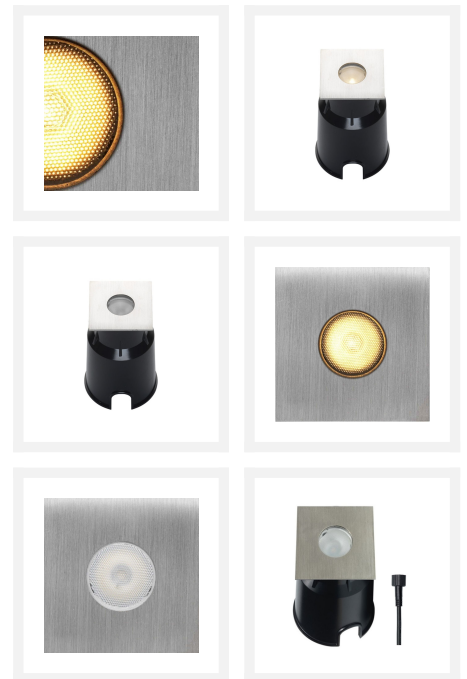

## Short Description

---

The Cree LED ground light Braga is suitable for illuminating a tree, shrub or object between 2 and 5 metres in height. You can also light up a facade with this ground light. The Braga ground light has an economical consumption of 3 watts and is part of the 24-volt garden lighting system.

## Description

---

The Cree LED Braga ground light creates with its warm white light colour (2700k) and light angle of 30° an atmospheric view in your garden. The Braga ground light is energy-efficient, environmentally friendly and uses only 3 watts. The ground light is made from stainless steel and has an IP value of 67 (IP-67). IP67 means that the Braga ground light is completely dustproof and resistant to splash and spray water. The housing of this ground light is provided with a notch for the cable. This prevents the cable from being crushed under the ground. The cable that is attached to the ground light is 1 metre long and is equipped with a 24-volt connector.

The Braga LED ground light is part of the 24-volt garden lighting system. This means that you can easily connect this ground light with other ground lights, but also with the other 24-volt garden lighting from our range. For the operation of this ground light, you need a 24-volt transformer. You can choose from the LED transformer 24 volts or the Astro LED transformer 24 volts. The 24-volt LED transformer ensures that the incoming 230 volts are converted to low voltage (24 volts). The Astro LED transformer 24 Volt also does this, but this transformer can be programmed to 5 different positions and can be used to control the lighting. You can connect up to 80 Watts of different types of 24-volt garden lighting to both transformers. Both transformers are not supplied as standard. So if you do not yet have a 24-volt transformer, you must add one of the two transformers to your order.

There are several ways to operate this ground spotlight. You can do this by using:

- Astro transformer
- Moon remote control
- Push dimmer / Remote control Novex
- App

If you want to use the Moon, Novex and/or app to control the spotlight, you must first purchase the wifi garden LED receiver. When you purchase this receiver, you get free access to the app, which allows you to control the ground spotlight.

With 24-volt extension cables and 24-volt cable connectors, you can connect multiple Braga ground lights with our other 24-volt garden lights. These accessories must be ordered separately from our webshop.

Tip: The wiring of 24-volt lights can be hidden under a layer of sand and does not have to be laid 60 cm under the ground.

When ordering the Cree LED Braga ground light, you will receive a 5-year warranty. Would you like more information about this ground light? Read all product specifications or contact our LED specialists.

## Additional Information

Article number	L2181
EAN code	7435124543547
Brand	Hamulight
Suitable for	Outside
Light color	Warm white (2700K)
Input voltage	24V DC
LED chip	Cree
Consumption	3 watt
Dimmable	No
Lumen per LED (including lens)	145 lm
Color Rendering Index (CRI)	>82
Light angle	30 Degrees
Length	50 mm
Width	50 mm
Height	95 mm
Hole size	43 mm
Cabling per LED	100 cm
Transformer required?	Yes
Material	Stainless steel
IP value	IP67
IK value	IK07
Quality mark	CE, Rohs
Warranty	5 years
Energy label old	A++
Energy label new	G