




Cree LED surface mounted spotlight veranda Gomera los | warm white | 3 watt

Product Images

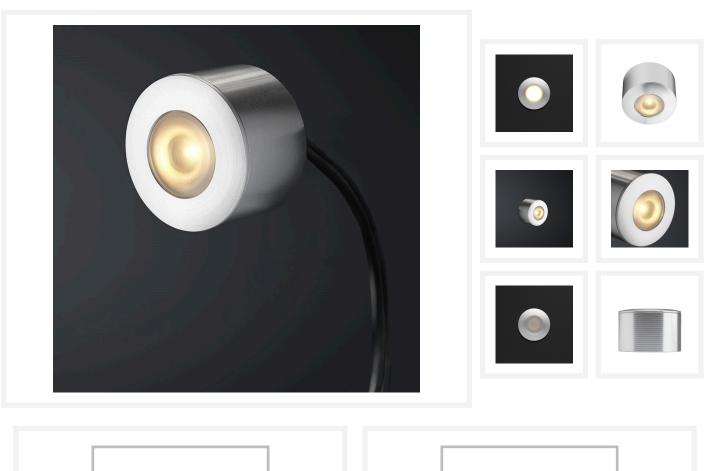





Short Description

This spot from the Gomera series is an addition to your current Gomera porch set.

Description

Would you like to expand your current Gomera porch set by Hamulight? Then this is the spotlight you need. Check whether you can expand the set at all. You can do this by looking at the connector (attached to the transformer). Are there any free connections? Then it is possible to fill the free connections with spots.

Please note: if there is a jumper in a connection, this is also regarded as a free connection and can be replaced by a separate spotlight.

Additional Information

Article number L2021 EAN code 7435124522511 Brand Hamulight LED chip Cree Spot color Aluminium Suitable for Inside & outside Consumption 3 watt Input voltage 700mA Light color Warm white (2700K) Lumen per LED (including lens) 125 Im Color Rendering Index (CRI) >92 Light angle 30 Degrees Dimmable Yes Titable No Cabling per LED 500 cm Transformer required? Yes Diameter 33 mm Height 21 mm Material Aluminium IP value IP44 Quality mark CE, Rohs Warranty 3 years		
Brand Hamulight LED chip Cree Spot color Aluminium Suitable for Inside & outside Consumption 3 watt Input voltage 700mA Light color Warm white (2700K) Lumen per LED (including lens) 125 lm Color Rendering Index (CRI) >92 Light angle 30 Degrees Dimmable Yes Titable No Cabling per LED 500 cm Transformer required? Yes Diameter 33 mm Height 21 mm Material Aluminium IP value IP44 Quality mark CE, Rohs	Article number	L2021
LED chip Cree Spot color Aluminium Suitable for Inside & outside Consumption 3 watt Input voltage 700mA Light color Warm white (2700K) Lumen per LED (including lens) 125 Im Color Rendering Index (CRI) >92 Light angle 30 Degrees Dimmable Yes Tiltable No Cabling per LED 500 cm Transformer required? Yes Diameter 33 mm Height Aluminium Material Aluminium IP value IP44 Quality mark CE, Rohs	EAN code	7435124522511
Spot color Aluminium Suitable for Inside & outside Consumption 3 watt Input voltage 700mA Light color warm white (2700K) Lumen per LED (including lens) 125 Im Color Rendering Index (CRI) >92 Light angle 30 Degrees Dimmable Yes Tiltable No Cabling per LED 500 cm Transformer required? Yes Diameter 33 mm Height Aluminium Material Aluminium IP value IP44 Quality mark CE, Rohs	Brand	Hamulight
Suitable for Inside & outside Consumption 3 watt Input voltage 700mA Light color Warm white (2700K) Lumen per LED (including lens) 125 Im Color Rendering Index (CRI) 992 Light angle 30 Degrees Dimmable Yes Tiltable No Cabling per LED Transformer required? Yes Diameter 33 mm Height 21 mm Material Aluminium IP value 1P44 Quality mark Consumption 19 warm white (2700K) Transformer required? Inside & outside Autility and the suit of t	LED chip	Cree
Consumption 3 watt Input voltage 700mA Light color warm white (2700K) Lumen per LED (including lens) 125 Im Color Rendering Index (CRI) >92 Light angle 30 Degrees Dimmable Yes Tiltable No Cabling per LED 500 cm Transformer required? Yes Diameter 33 mm Height 21 mm Material Aluminium IP value IP44 Quality mark CE, Rohs	Spot color	Aluminium
Input voltage700mALight colorwarm white (2700K)Lumen per LED (including lens)125 ImColor Rendering Index (CRI)>92Light angle30 DegreesDimmableYesTiltableNoCabling per LED500 cmTransformer required?YesDiameter33 mmHeight21 mmMaterialAluminiumIP valueIP44Quality markCE, Rohs	Suitable for	Inside & outside
Light colorWarm white (2700K)Lumen per LED (including lens)125 lmColor Rendering Index (CRI)>92Light angle30 DegreesDimmableYesTiltableNoCabling per LED500 cmTransformer required?YesDiameter33 mmHeight21 mmMaterialAluminiumIP valueIP44Quality markCE, Rohs	Consumption	3 watt
Lumen per LED (including lens)125 ImColor Rendering Index (CRI)>92Light angle30 DegreesDimmableYesTiltableNoCabling per LED500 cmTransformer required?YesDiameter33 mmHeight21 mmMaterialAluminiumIP valueIP44Quality markCE, Rohs	Input voltage	700mA
Color Rendering Index (CRI)>92Light angle30 DegreesDimmableYesTiltableNoCabling per LED500 cmTransformer required?YesDiameter33 mmHeight21 mmMaterialAluminiumIP valueIP44Quality markCE, Rohs	Light color	Warm white (2700K)
Light angle30 DegreesDimmableYesTiltableNoCabling per LED500 cmTransformer required?YesDiameter33 mmHeight21 mmMaterialAluminiumIP valueIP44Quality markCE, Rohs	Lumen per LED (including lens)	125 lm
Dimmable Yes Tiltable No Cabling per LED 500 cm Transformer required? Yes Diameter 33 mm Height 21 mm Material Aluminium IP value IP44 Quality mark CE, Rohs	Color Rendering Index (CRI)	>92
Tiltable No Cabling per LED 500 cm Transformer required? Yes Diameter 33 mm Height 21 mm Material Aluminium IP value IP44 Quality mark CE, Rohs	Light angle	30 Degrees
Cabling per LED500 cmTransformer required?YesDiameter33 mmHeight21 mmMaterialAluminiumIP valueIP44Quality markCE, Rohs	Dimmable	Yes
Transformer required? Diameter 33 mm Height Material Aluminium IP value Quality mark Yes Aluminium Transformer required? Yes Aluminium CE, Rohs	Tiltable	No
Diameter33 mmHeight21 mmMaterialAluminiumIP valueIP44Quality markCE, Rohs	Cabling per LED	500 cm
Height 21 mm Material Aluminium IP value IP44 Quality mark CE, Rohs	Transformer required?	Yes
Material Aluminium IP value IP44 Quality mark CE, Rohs	Diameter	33 mm
IP value IP44 Quality mark CE, Rohs	Height	21 mm
Quality mark CE, Rohs	Material	Aluminium
	IP value	IP44
Warranty 3 years	Quality mark	CE, Rohs
	Warranty	3 years