

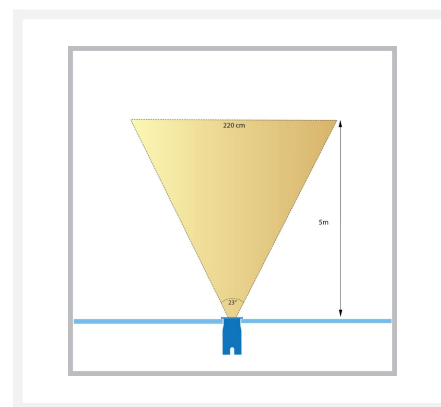
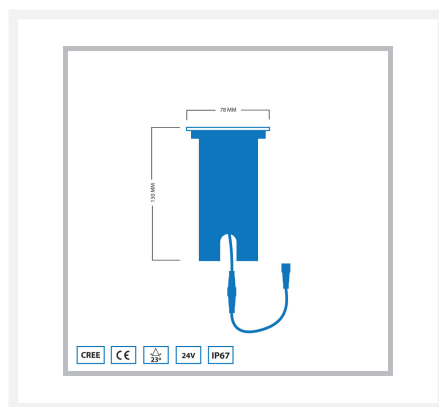


Cree LED ground light Lisbon | warm white | 5 watt | round | 24 volts

Product Images

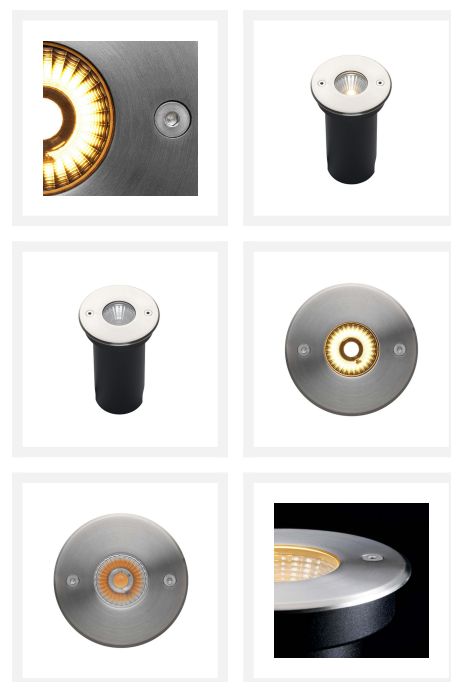

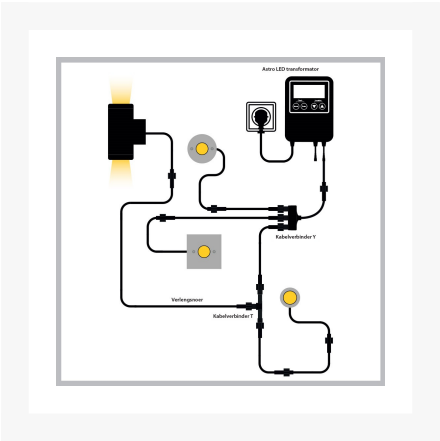

Short Description

The Cree LED ground light Lisbon is extremely well suited for illuminating a tree, shrub or object between 5 and 7 metres in height. This ground light also does a good job of illuminating a facade. The Lisbon ground light consumes 5 watts and operates on a voltage of 24 volts.

Description

The Cree LED Lisbon ground light creates a pleasant atmosphere in your garden with its 30° light angle and warm white light colour (2700k). The ground light is energy-efficient and consumes only 3 watts. The spotlight is weather-resistant thanks to its IP value of 67. IP67 indicates that the Cree LED ground lights are dustproof and resistant to splash and spray water. The ground light is made of stainless steel and the housing has a notch for the cable. This prevents the cable from being crushed under the ground. The cable that is attached to the ground light is 1 metre long and is fitted with the 24-volt connector.

The Lisbon LED ground light is part of the 24-volt garden lighting system. This means that you can easily connect this ground light with other ground light, but also with the other 24-volt garden lighting from our range. For the operation of this ground light, you need a 24-volt transformer. You can choose from the LED transformer 24 volts or the Astro LED transformer 24 volts. The 24-volt LED transformer ensures that the incoming 230 volts are converted to low voltage (24 volts). The Astro LED transformer 24 Volt also does this, but this transformer can be programmed to 5 different positions and can be used to control the lighting. You can connect up to 80 Watts of different types of 24-volt garden lighting to both transformers. Both transformers are not supplied as standard. So if you do not yet have a 24-volt transformer, you must add one of the two transformers to your order.

You have the option of different ways to operate this ground spotlight, such as:

- Astro transformer
- Moon remote control
- Push dimmer / Remote control Novex
- App

If you want to use the Moon, Novex and/or app to control the spotlights, you need to buy the wifi garden LED receiver. Buying this receiver will give you access to the app that allows you to control the ground spotlight.

Tip: the wiring of 24-volt lights can be hidden under a layer of sand and does not have to be laid 60 cm underground.

You will receive a 5-year warranty on the Lisbon LED spotlight. You can find more product information about the Lisbon ground light in the product specifications. Do you have a question for our LED specialists? Please feel free to contact us.

Additional Information

Article number	L2182
EAN code	7435124543554
Brand	Hamulight
Suitable for	Outside
Light color	Warm white (2700K)
Input voltage	24V DC
LED chip	Cree
Consumption	5 watt
Dimmable	No
Lumen per LED (including lens)	500 lm
Color Rendering Index (CRI)	>82
Light angle	23 Degrees
Diameter	78 mm
Height	130 mm
Hole size	70 mm
Cabling per LED	100 cm
Transformer required?	Yes
Material	Stainless steel
IP value	IP67
IK value	IK08
Quality mark	CE, Rohs
Warranty	5 years
Energy label old	A++
Energy label new	F